




**REPAIR
PANEL
SELECTOR**

INSULATED DOOR PANEL

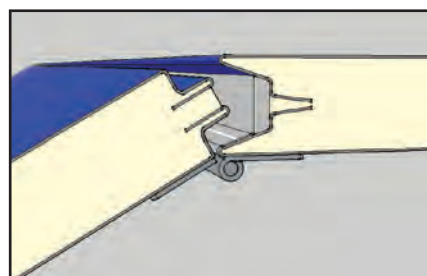




'W' Type (40mm)

CHARACTERISTICS

- Insulation: High density, self-extinguishing CFC-free Polyurethane foam
- Inner and outer skins: Pre-painted galvanised steel
- Coating: 25 um Polyester or 200 um Plastisol
- Internal and External faces Stucco embossed (smooth Leathergrain External face for Plastisol)
- A PVC sealing tape is applied during production to the panel nose
- Female side incorporates a factory applied low density compressible foam seal, for air and water tightness (Both Class 3 as per EN 13241-1)
- Both sides protected with adhesive polythene film (to be removed before installation)

SPECIFICATION

DIMENSIONS: 610 x 40
 WEIGHT: 5.40kg/lin.m (Polyester Stucco Embossed)
 6.10kg/lin.m (Plastisol Leathergrain)
 STOCK LENGTHS: 4200mm and 9200mm

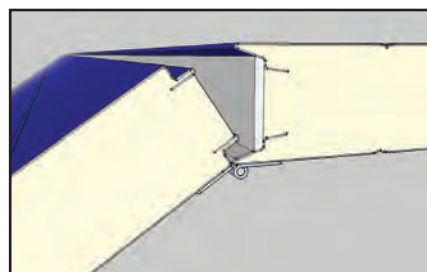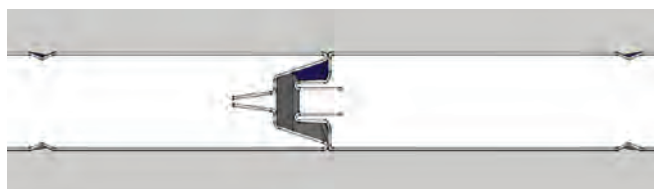



'W' Type (80mm)

CHARACTERISTICS



- Insulation: High density, self-extinguishing CFC-free Polyurethane foam
- Inner and outer skins: Pre-painted galvanised steel
- Coating: 25 um Polyester
- Standard Colour: White - RAL9010
- Limited Stock: RAL9007 and RAL9006 External Face Only
- Inner and outer faces Stucco embossed
- A PVC sealing tape is applied during production to the panel nose
- Female side incorporates a factory applied low density compressible foam seal, for air and water tightness (Both Class 3 as per EN 13241-1)
- Both sides protected with adhesive polythene film (to be removed before installation)

SPECIFICATION

DIMENSIONS: 610 x 80
 WEIGHT: 7.32kg/lin.m (Polyester Stucco Steel)
 STOCK LENGTHS: 9200mm

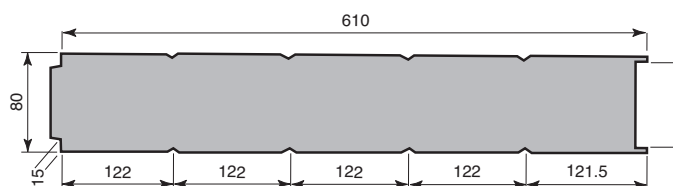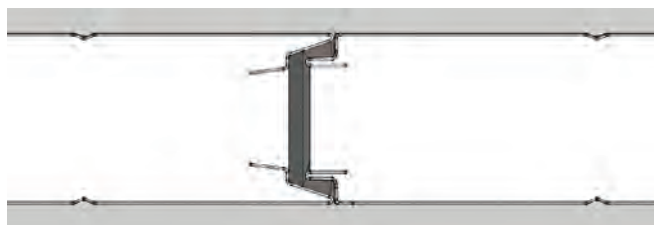

INSULATED DOOR PANEL

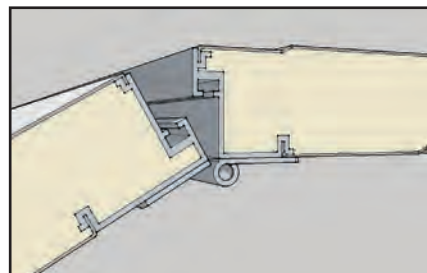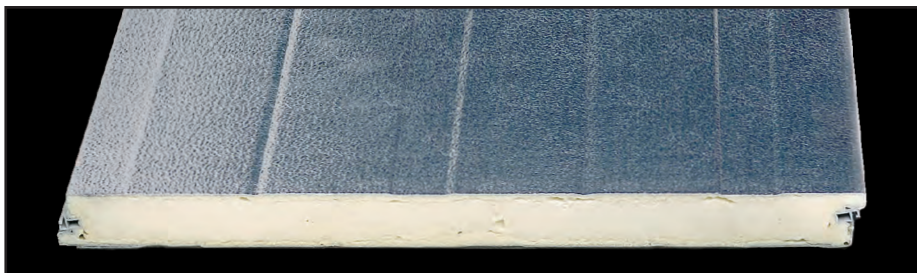

European 'C' Type

CHARACTERISTICS




- Industrial type panels to suit traditional stepped joint
- Insulation: High density Polyurethane foam
- Inner and outer skins: Pre-painted galvanised steel (RAL 9006) or self colour aluminium
- Inner and outer faces Stucco embossed

SPECIFICATION

DIMENSIONS: 500 x 40

WEIGHT: 4.25kg/lin.m (Aluminium) 5.33kg/lin.m (Steel)

STOCK LENGTH: 6200mm and 8300mm

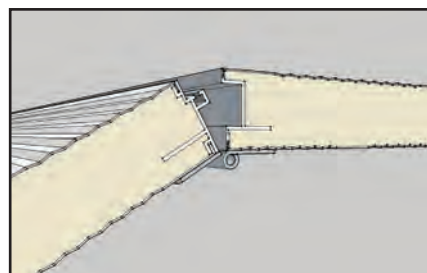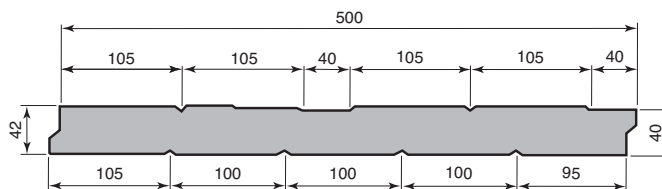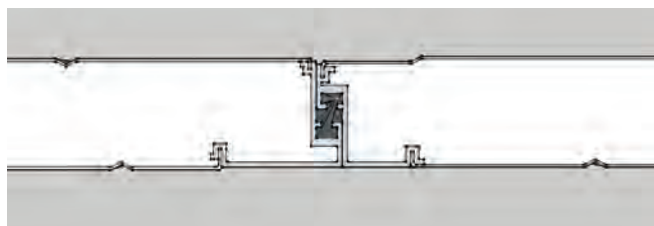

European 'CML' Type

CHARACTERISTICS



- Industrial type panels to suit traditional stepped joint
- Insulation: High density Polyurethane foam
- Inner and outer skins: Pre-painted galvanised steel RAL9006 External and RAL9002 Internal

SPECIFICATION



DIMENSIONS: 600 x 42

WEIGHT: 6.59kg/lin.m

STOCK LENGTH: 8200mm

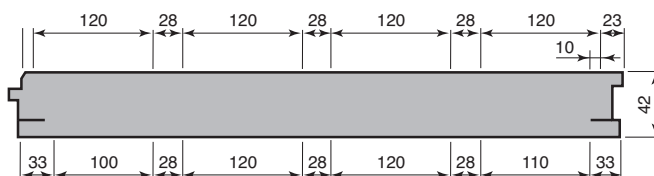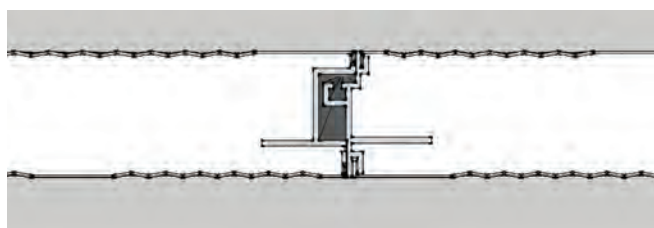

INSULATED DOOR PANEL

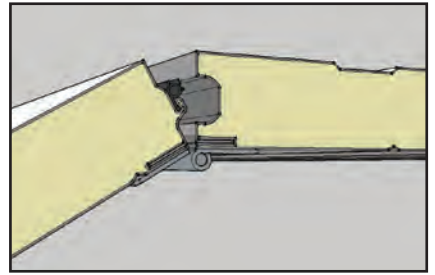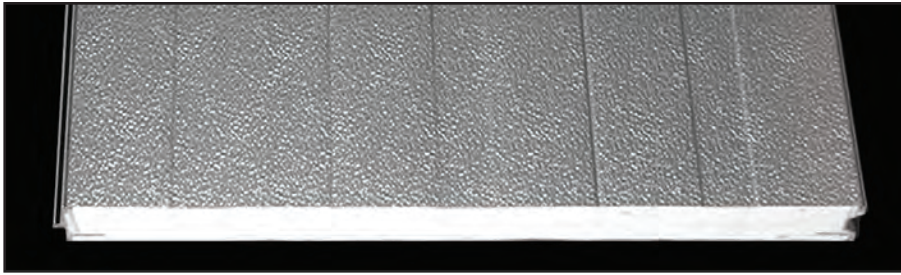




European 'N' Type

CHARACTERISTICS

- Industrial type panels to suit tongue and groove joint
- Insulation: High density Polyurethane foam,
- Inner and outer skins: Self colour aluminium
- Inner and outer faces Stucco embossed

SPECIFICATION

DIMENSIONS: 610 x 45
WEIGHT: 3.35kg/lin.m (Aluminium)
STOCK LENGTH: 6050mm

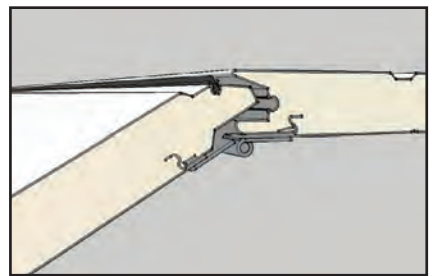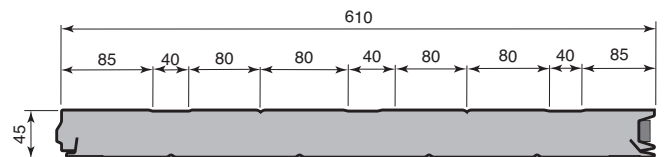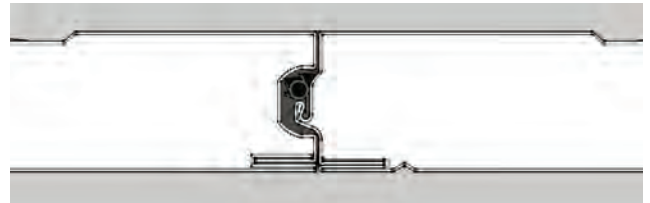



European 'H' Type

CHARACTERISTICS











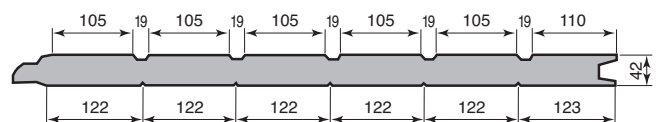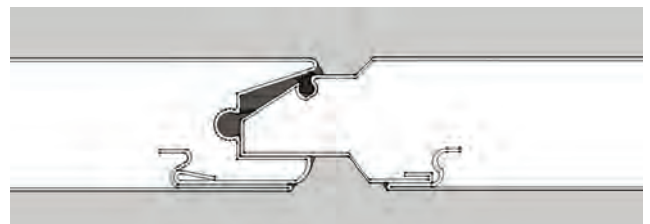








- Industrial type panels to suit finger safe joint
- Insulation: High density Polyurethane foam
- Inner and outer skins: Pre-painted galvanised steel RAL9002 External and RAL9010 Internal
- Coating: Zinc Coating 250g/m² 25 um Finish
- Inner and outer faces Stucco embossed
- Both sides protected with adhesive polythene film (to be removed before installation)

SPECIFICATION

DIMENSIONS: 750 x 42
WEIGHT: 7.05kg/lin.m
STOCK LENGTH: 6200mm



Standard 'W' Type Polyester 610 x 40 Colours & Finishes

						
WHITE RAL9010	BONE WHITE RAL9002	ANTHRACITE RAL7016	GREY ALUMINIUM RAL9007	MERLIN GREY BS18B25	SILVER RAL9006	GOOSEWING GREY BS10A05
						
BLUE GREY BS18B17	REGATTA BLUE BS18E53	GENTIAN BLUE RAL5010	OCEAN BLUE BS18C39	PACIFIC BLUE RAL5003	MOSS GREEN RAL6005	OLIVE GREEN RAL6003
						
JUNIPER GREEN BS12B29	FOREST GREEN RAL6002	KHAKI GREEN BS12B21	AZTEC YELLOW BS10E55	POPPY RED BS04E53	SUNSET RED RAL3000	VAN DYKE BROWN RAL8014




Due to the printing process the panel colours may not be exact and therefore should not be relied on.



COLOUR SWATCHES AVAILABLE (while stocks last)

	VAN DYKE BROWN - RAL8014	SUNSET RED - RAL3000	POPPY RED - BS04E53	AZTEC YELLOW - BS10E55	KHAKI GREEN - BS12B21	FOREST GREEN - RAL6002	JUNIPER GREEN - BS12B29	OLIVE GREEN - RAL6003	MOSS GREEN - RAL6005	PACIFIC BLUE - RAL5003	OCEAN BLUE - BS18C39	GENTIAN BLUE - RAL5010	REGATTA BLUE - BS18E53	BLUE GREY - BS18B17	GOOSEWING GREY - BS10A05	SILVER - RAL9006	MERLIN GREY - BS18B25	GREY ALUMINIUM - RAL9007	ANTHRACITE - RAL7016	BONE WHITE - RAL9002	WHITE - RAL9010
ARCHITECTURAL POLYESTER STUCCO STANDARD FINISHES FOR 'W' TYPE 610 X 40 PANELS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

All panels shown in this leaflet are available from stock in bulk or as individual panels which can be supplied "raw" or made up with end caps, aluminium retainers and seals.



Residential and other
500mm panels
available in various
standard colours


Panel Accessories



WINDOWS



BOTTOM SEAL
SAFETY EDGE



TOP
SEALS




BOTTOM
SEALS




WICKET DOOR
KITS



FOOT STEP
HANDLE



VENTILATION
GRILLES



END CAPS



SHOOT
BOLTS




SIDE
LOCKS



PANEL
STRUTS



ELECTRIC
OPERATORS



PANEL
ADAPTOR



TOP/BOTTOM
RETAINERS

HOW TO FIND US

OSA Door Parts, Unit 4, Ashville Industrial Estate,
Runcorn, Cheshire, WA7 3EZ. UK.



OSA
DOOR PARTS
TRADE SUPPLIERS

To order please contact us:

Tel: 01928 703 580 Fax: 01928 759 984

Email: sales@osadoorparts.co.uk



We reserve the right to change specifications and prices without prior notice or alteration of this brochure.

