



PANEL

ITALIAN DESIGN SWISS MADE

HARDWARE

EUROPEAN SOURCED


MOTORS & CONTROLS

MADE IN GERMANY

SECTIONAL - GARAGE DOORS

EACH OSA DOOR - MADE SPECIFICALLY TO FIT YOUR GARAGE - IN BRITAIN



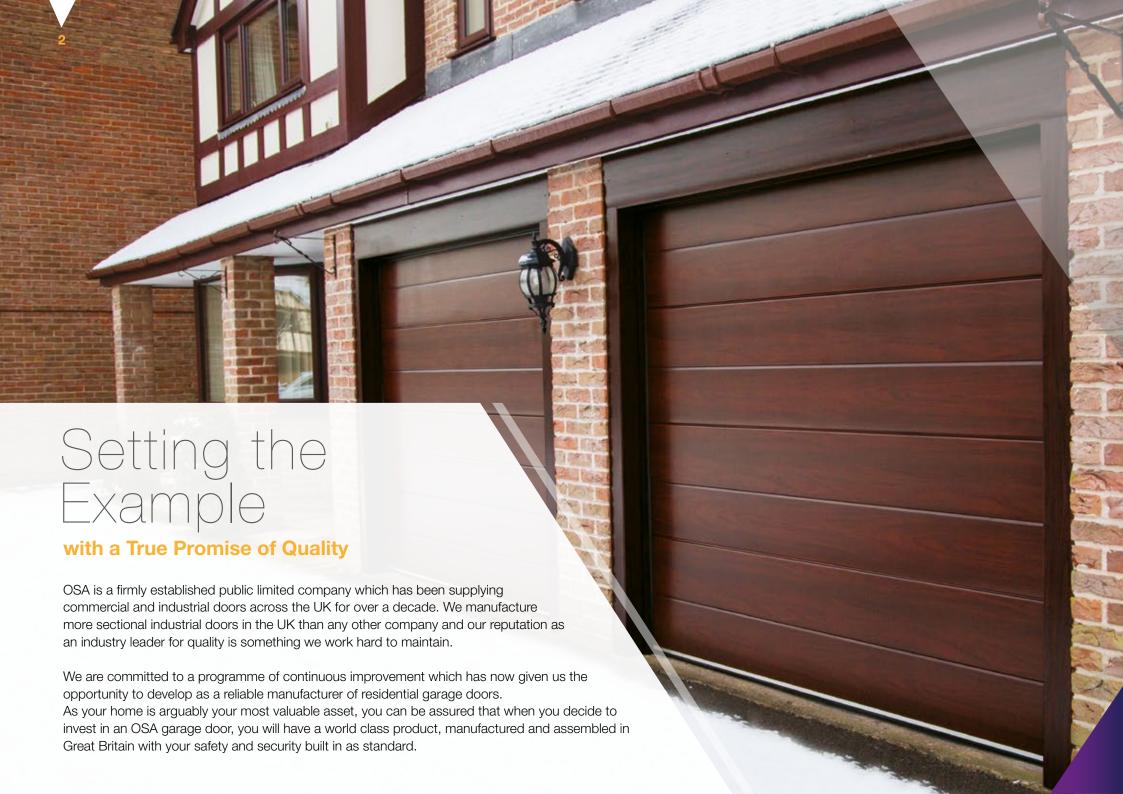


Benefits at a Glance

Optimal Use of Space

OSA sectional garage doors open vertically which means you can park your car right up to the door.

This allows you to use every inch of space in front and inside your garage. As no door frame is required within the opening, you can also take full advantage of the increased drive through height and width. This is ideal for vehicles such as 4x4's and MPV's.

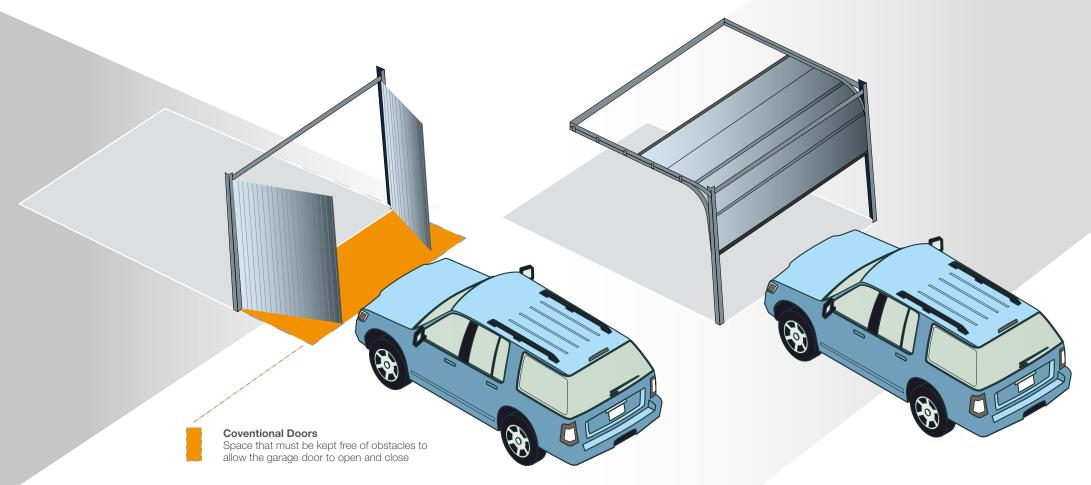

Weatherproof and Energy Efficient

40mm thick panels with high density polyurethane foam provide excellent insulation.

Flexible and weather resistant seals on all four sides of your OSA door keep out the wind, rain and snow allowing you to maintain a constant temperature within your garage.


Panel Information

500 mm deep panels, 40mm thickness. Two pre coated galvanised steel skins filled with high density, self extinguishing, HCFC-free closed cell polyurethane foam. Panel joints fitted with a closed cell gasket providing increased air and water tightness (both class 3 as per EN 13241-1)

Seal Information

- **Top Seal:** Ensures the lintel to the top of the structure fits tightly against the top panel of your door.
- Side Seals: Hard, black PVC which fits snugly to the galvanised powder coated frame and against the panel.
- Bottom Seals: Attached to the aluminium seal retainer on the bottom of the door providing additional sealing against the floor of your garage.
- Sealed All Round: Flexible and weather resistant seals on all four sides means your door will keep in the warmth and keep out the wind and rain. This extra benefit will be appreciated fully after your door has been fitted.



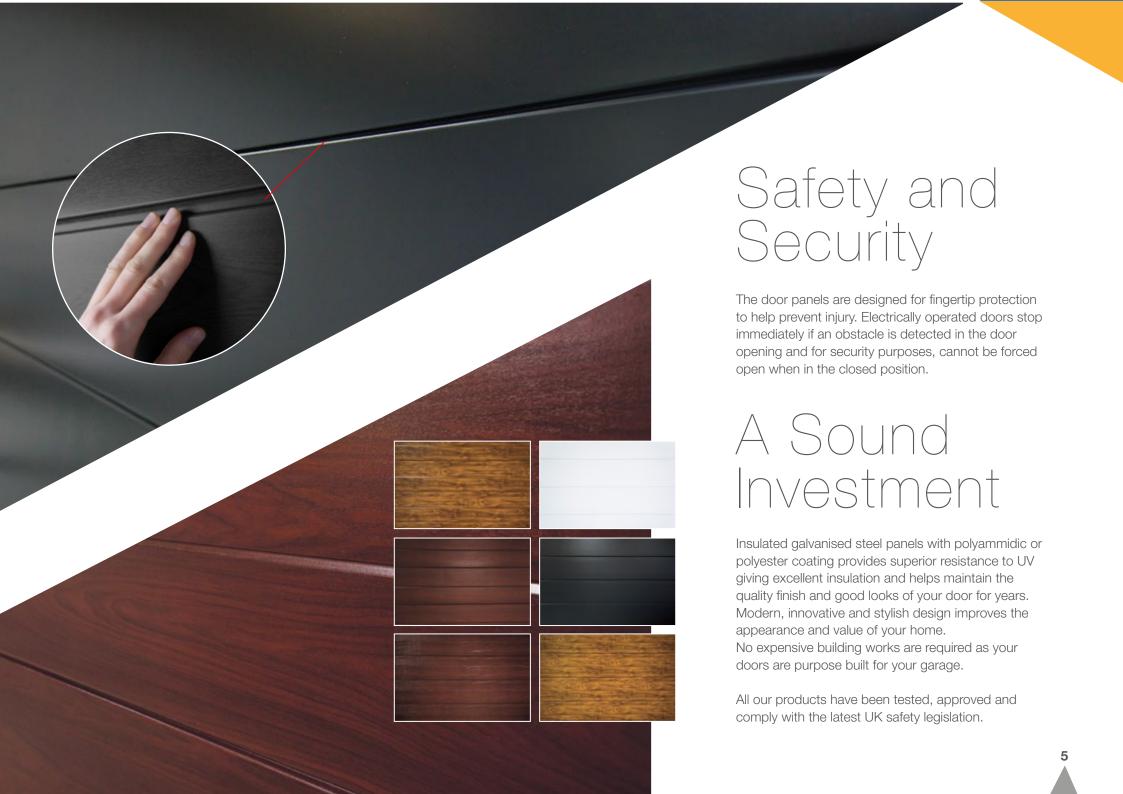

Evo Line Panel

Attractive, contemporary styling

One horizontal line per panel gives a clean, smooth, architectural character to your door that is guaranteed never to be out of fashion.



Choose from a diverse range of doors and surface designs incorporating the latest UK approved safety and security standards in a range of colours.







• Golden Oak - Smooth



Rosewood - Smooth



• Anthracite RAL7016 - Polygrain only



- Internal Surface Finish Stucco RAL9010
- 40mm thick, double skinned, insulated steel panels



Flat Panel

Engineering for long lasting good looks

Consistency of style and design of this garage door will enhance the overall appearance of your home.





• White RAL9016 - Polygrain



Rosewood - Smooth or Woodgrain Embossed



• Golden Oak - Smooth or Woodgrain Embossed



• Anthracite RAL7016 - Polygrain only



- Internal Surface Finish Stucco RAL9010
- 40mm thick, double skinned, insulated steel panels




Georgian Cassette Panel

Combining elegance and tradition

A classic look with an embossed woodgrain effect gives a distinctive, dynamic flavour to this door which is very much a traditional design.



- Internal Surface Finish Stucco RAL9010
- 40mm thick, double skinned, insulated steel panels





White RAL9010




Golden Oak



Rosewood

The Perfect Fit



Georgian Panels

All Georgian Cassette Panels are 500mm deep. To maintain the aesthetics and appealing look of your door, it may have to be manufactured with plain panels at the top and/or bottom.

Give your door the personal touch


Choose the perfect window and handle to create an individual design

Impressive glass windows allow daylight to enter your garage which means this space can be used as a workshop or hobby room.

All window options are double glazed for excellent insulation.



Hardened Glass - Clear or Opaque

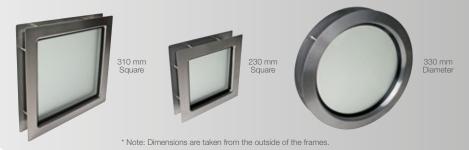

Elegant stainless steel window trims enhance the designer look of your door.

Acrylic - Clear or Opaque



Handle



Cylinder Lock



Suitable for manual doors only.

• Emergency release locking system in case of power failure


For use when the only way into the garage is by the garage door.

Small lock with discreet appearance allowing the door to be opened by hand.




Garage Door Operators

The OSA garage door is offered with the option of two German manufactured Sommer/Aperto operators



Baseline

- Built in lighting automatically switches off after 20 seconds
- Supplied with two handsets
- Impulse activation
- Can be fitted with wall mounted push button



Baseline

Convenience and safety with speed and power

Suitable for all doors up to 3000mm wide and maximum height of 2.3 meters

- Drive system provides quiet running without wear
- Quick, safe, easy to operate
 - Self locking motor for effective protection against unauthorised entry or power failure
 - Individually coded for security
 - Reliable operation with 868.8MHz radio frequency
 - Simple programming of the hand transmitter by radio
 - Extremely quiet opening and closing



Duo Rapido Model

Proven innovative technology with elegant design

Suitable for all doors up to 3.0 metres high

- Fast door opening with up to 240mm/s, your door will open in seconds
- Slow closing for safety including automatic closing function
- Light control button supplied with 5m connection cable for wall or ceiling installation
- Optimal protection with automatic obstacle detection
- Low energy consumption
- Supplied with two handsets

Radio Remote Controls

Ease and convenience at the touch of a button




• 2 Command Transmitter
Range: approx. 25m
(depending on surroundings)
Battery: 3 V, type CR2032

Dimensions : 81 x 24 x 12mm



For 2 command transmitter For fixing in a car or on a wall Includes fixing material



"ENTRApin" Wireless Keypad

Opens garage doors with your personal PIN code Quick and easy installation, no need to run wires

Memory: 1 access code

Radio Frequency: FM 868.8 MHz

(Somloq Rollingcode)
Range: Approx. 25m

(depending on surroundings)

4 Command Transmitter "Slider"

Housing with slider function High quality, modern design in stainless steel application

Range: approx. 35mm (depending on surroundings) Battery: 3 V, type CR2032

Dimensions: 62 x 35 x 16mm (when closed)



"ENTRAsys"GD Fingerprint System

Opens garage doors by biometric recognition at the swipe of a finger. Quick and easy installation, no need to run wires

Memory: Max. 50-80 fingerprints

Radio Frequency: FM 868.8 MHz (Somlog Rollingcode)

Range: Approx. 50m

(depending on surroundings)

(depending on surroundings)



Radio Wall Button, Surfaced-mounted (3 command)

Wireless switch which means no additional wires or cables are required at switch location

Available in white and anthracite

Range: Approx. 25m (depending on surroundings)

Battery: 3 V, type CR 2032 Dimensions: 80 x 85 x 15mm





